




ANTAEUS 325-6

VIBRATORY PILE DRIVER & EXTRACTOR

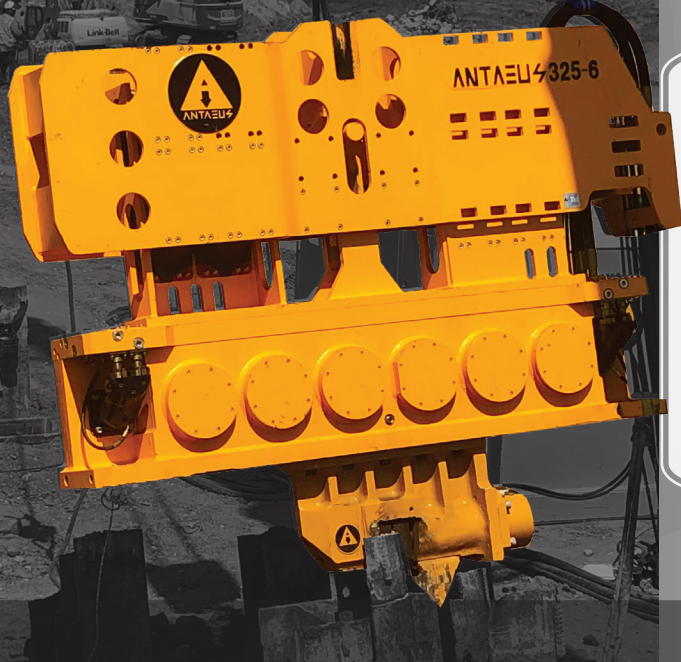

ECCENTRIC MOMENT	7,000 IN-LBS	80,6 KG-M
DRIVE FORCE	255 TONS	2 270 KN
FREQUENCY	0-1650 VPM	0-1650 VPM
MAX LINE PULL	185 TONS	1 646 KN
WEIGHT *W/O CLAMPS	19,450 LBS	8 822 KG
THROAT WIDTH	16.75 INCHES	42,54 CM
LENGTH	140 INCHES	140 INCHES
HEIGHT	75 INCHES	191 CM

ENGINE TYPE	TIER 4, STAGE 5 C18	
HORSE POWER	800 HP	597 KW
ENGINE SPEED	1,800 RPM + UPDRIVE™	
DRIVE PRESSURE	4,500 PSI	331 BAR
DRIVE FLOW	231 GPM	874 LPM
CLAMP PRESSURE	4,800 PSI	350 BAR
CLAMP FLOW	10 GPM	3 LPM
WEIGHT (ALL FLUIDS)	23,900 LBS	10 840 KG
LENGTH	185 INCHES	470 CM
HEIGHT	95 INCHES	241 CM
HYDRAULIC RESERVOIR SIZE	800 GAL	3 028 LITERS
SPARE HYD RESERVOIR SIZE	55 GAL	208 LITERS
FUEL CAPACITY	150 GAL	567 LITERS

800HP POWER UNIT

- OPERATES VIBROS, DRILLS & IMPACTS
- SPARE HYDRAULIC TANK
- FULL FORWARD AND REVERSE
- MEETS EUROPEAN REGULATIONS

